


Try-Loop® Expansion Loops & Seismic Connectors

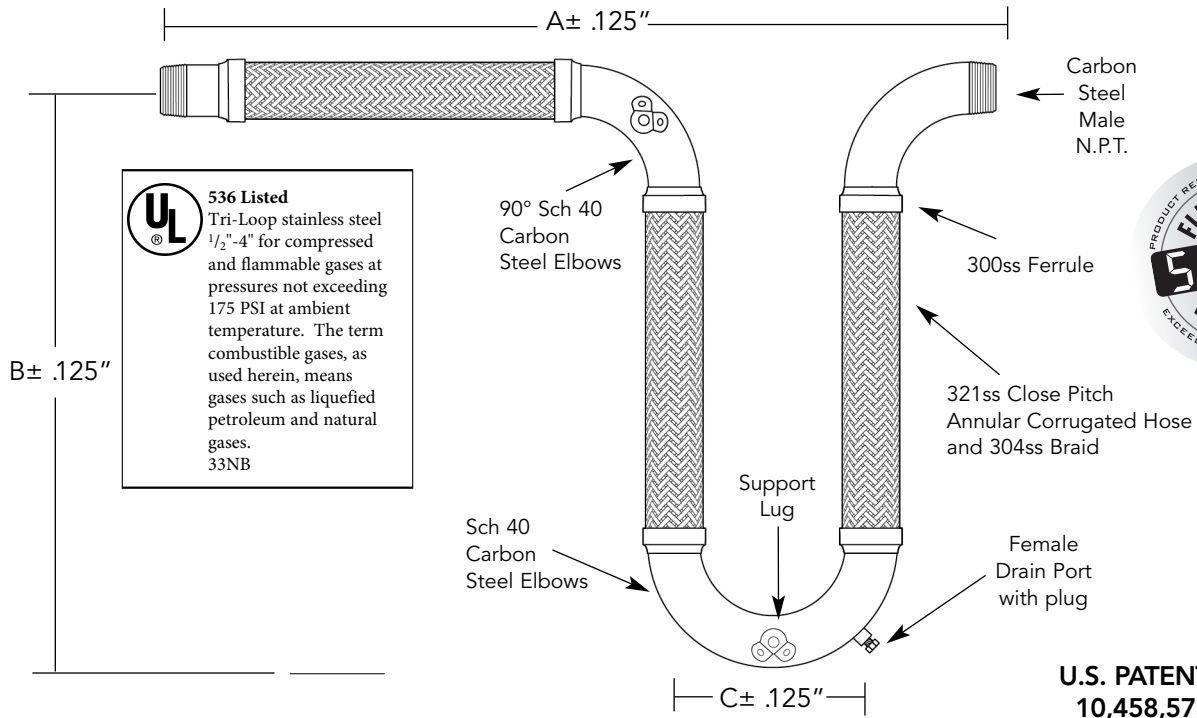

Qty.	Pipe Size (in.)	DIMENSIONS (in.)			Pressure (PSI) 70° F	Compression (in.)	Extension (in.)	Parallel (in.)	Rotation "X" Axis (deg.)	Non-Parallel "Y" Axis (deg.)	Drain Port (in.)	Wt. (lb.)	Notes
		A	B	C									
	1/2	22.00	14.00	5.50	175	2	2	2	25°	1	1/4	1.9	
	3/4	23.25	14.50	6.25	175	2	2	2	20°	1	1/4	2.6	
	1	24.50	15.75	6.50	175	2	2	2	20°	1	1/2	4.4	
	1.25	30.00	18.00	6.75	175	2	2	2	15°	1	1/2	6.4	
	1.5	29.00	19.50	6.50	175	2	2	2	15°	1	1/2	7.8	
	2	32.75	22.25	7.75	175	2	2	2	10°	1	1/2	14	
	2.5	36.25	25.00	8.75	175	2	2	2	10°	1	3/4	25	
	3	39.25	28.00	9.00	175	2	2	2	10°	1	3/4	35	
	4	46.75	33.00	12.00	175	2	2	2	5°	1	3/4	59	

MOVEMENT CAPABILITY: +/- 2"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

Expansion & Seismic Loops UL536 Listed

ULFHTRYL2SMN 1/2"-4" I.D.