


# Try-Loop® Expansion Loops & Seismic Connectors

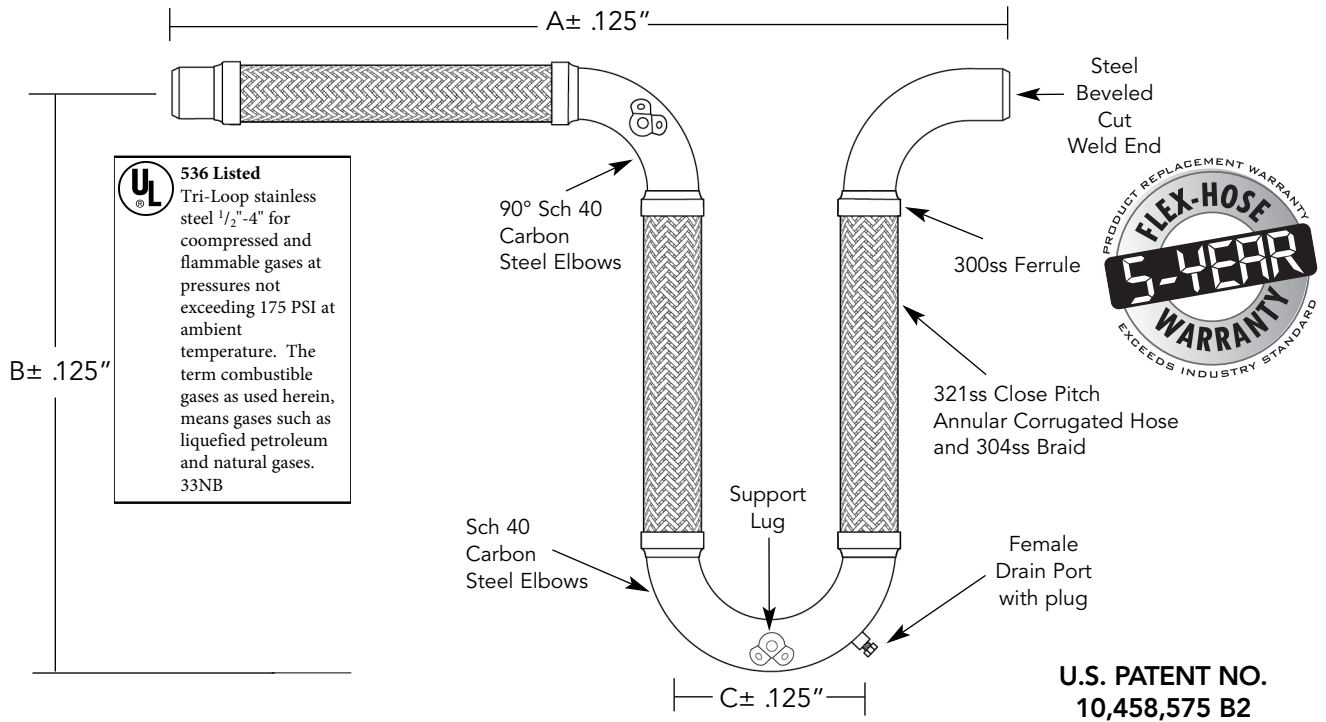

| Qty. | Pipe Size (in.) | DIMENSIONS (in.) |       |       | Pressure (PSI) 70° F | Compression (in.) | Extension (in.) | Parallel (in.) | Rotation "X" Axis (deg.) | Non-Parallel "Y" Axis (deg.) | Drain Port (in.) | Wt. (lb.) | Notes |
|------|-----------------|------------------|-------|-------|----------------------|-------------------|-----------------|----------------|--------------------------|------------------------------|------------------|-----------|-------|
|      |                 | A                | B     | C     |                      |                   |                 |                |                          |                              |                  |           |       |
|      | 1/2             | 23.50            | 14.00 | 5.50  | 175                  | 2                 | 2               | 2              | 25°                      | 1                            | 1/4              | 2         |       |
|      | 3/4             | 24.75            | 14.50 | 6.25  | 175                  | 2                 | 2               | 2              | 20°                      | 1                            | 1/4              | 3         |       |
|      | 1               | 27.50            | 15.75 | 6.50  | 175                  | 2                 | 2               | 2              | 20°                      | 1                            | 1/2              | 5         |       |
|      | 1.25            | 34.00            | 18.00 | 6.75  | 175                  | 2                 | 2               | 2              | 15°                      | 1                            | 1/2              | 8         |       |
|      | 1.5             | 37.00            | 19.50 | 6.50  | 175                  | 2                 | 2               | 2              | 15°                      | 1                            | 1/2              | 10        |       |
|      | 2               | 35.75            | 22.25 | 7.75  | 175                  | 2                 | 2               | 2              | 10°                      | 1                            | 1/2              | 15        |       |
|      | 2.5             | 39.25            | 25.00 | 8.75  | 175                  | 2                 | 2               | 2              | 10°                      | 1                            | 3/4              | 27        |       |
|      | 3               | 45.25            | 28.00 | 9.00  | 175                  | 2                 | 2               | 2              | 10°                      | 1                            | 3/4              | 38        |       |
|      | 4               | 50.75            | 33.00 | 12.00 | 175                  | 2                 | 2               | 2              | 5°                       | 1                            | 3/4              | 63        |       |

MOVEMENT CAPABILITY: +/-2"

|                |  |
|----------------|--|
| PROJECT        |  |
| CUSTOMER       |  |
| ENGINEER       |  |
| REPRESENTATIVE |  |
| DRAWING #      |  |



4560 Buckley Road  
Liverpool, New York USA 13088-2509  
315/437-1611 • Fax 315/437-1903  
www.flexhose.com • 1.877.TRI FLEX