


Try-Loop® Expansion Loops & Seismic Connectors

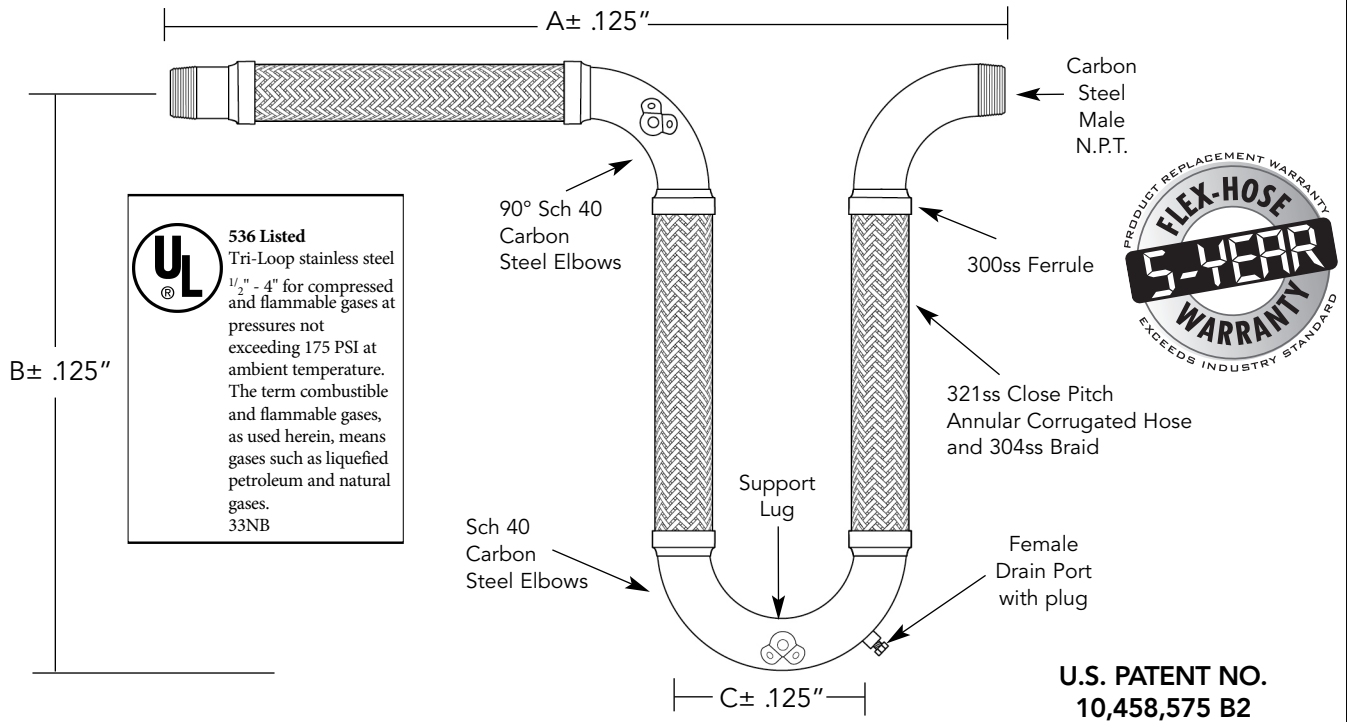

Qty.	Pipe Size (in.)	DIMENSIONS (in.)			Pressure (PSI) 70° F	Compression (in.)	Extension (in.)	Parallel (in.)	Rotation "X" Axis (deg.)	Non-Parallel "Y" Axis (deg.)	Drain Port (in.)	Wt. (lb.)	Notes
		A	B	C									
	1/2	29.50	18.00	9.50	175	4	4	4	35°	2	1/4	2.2	
	3/4	31.25	18.50	10.25	175	4	4	4	35°	2	1/4	3.0	
	1	33.25	20.50	10.50	175	4	4	4	30°	2	1/2	5.2	
	1.25	36.38	22.50	10.75	175	4	4	4	25°	2	1/2	7.3	
	1.5	38.00	24.50	10.50	175	4	4	4	25°	2	1/2	8.9	
	2	42.75	28.25	11.75	175	4	4	4	20°	2	1/2	17.0	
	2.5	45.50	31.00	12.00	175	4	4	4	20°	2	3/4	29.0	
	3	48.75	34.00	12.50	175	4	4	4	15°	2	3/4	39.0	
	4	56.00	40.00	14.25	175	4	4	4	10°	2	3/4	65.0	

MOVEMENT CAPABILITY: +/- 4"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX