


AssureFlex® Tri-Loop® Expansion Loops & Seismic Loops For Fire Protection



EX28995
(Flexible Joint Fitting)

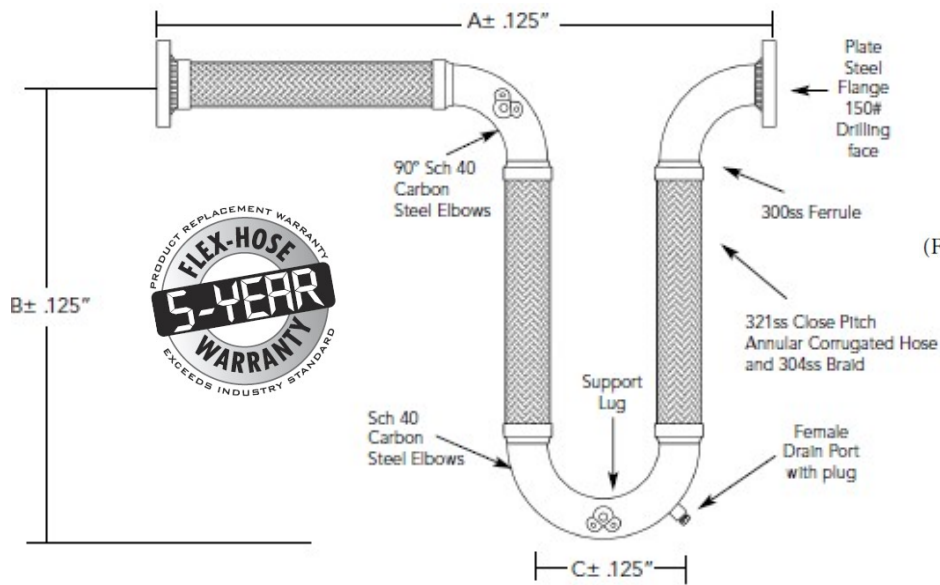

APPROVED
For Fire Protection Systems



CSA standard B-51 certified.
Inspected and tested by the
Technical Standards and
Safety Authority of Canada.


U.S. Patent No.
10,458,575 B2

Qty	I.D. (in.)	Dimensions			Pressure (PSI) @ 70° F	Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		"A" (in.)	"B" (in.)	"C" (in.)		Compression (in.)	Extension (in.)	Parallel (in.)	Rotate "X" Axis (Deg.)	Non- Parallel "Y" Axis (in.)			
	1.00	32.50	20.50	10.50	300	4.0	4.0	4.0	30°	2.0	½"	9	
	1.25	35.13	22.50	10.75	300	4.0	4.0	4.0	25°	2.0	½"	13	
	1.50	36.88	24.50	10.50	300	4.0	4.0	4.0	25°	2.0	½"	15	
	2.00	41.63	28.25	11.75	300	4.0	4.0	4.0	20°	2.0	½"	24	
	2.50	44.38	31.00	12.00	300	4.0	4.0	4.0	20°	2.0	¾"	39	
	3.00	47.63	34.00	12.50	300	4.0	4.0	4.0	15°	2.0	¾"	51	
	4.00	52.88	40.00	14.25	175	4.0	4.0	4.0	10°	2.0	¾"	77	
	5.00	64.25	51.00	15.00	175	4.0	4.0	4.0	10°	2.0	¾"	142	
	6.00	70.00	54.25	18.00	175	4.0	4.0	4.0	10°	2.0	¾"	170	
	8.00	84.25	63.25	24.00	175	4.0	4.0	4.0	5°	2.0	¾"	333	
	10.00	100.25	74.38	30.00	175	4.0	4.0	4.0	3°	2.0	¾"	542	
	12.00	115.25	84.38	36.00	175	4.0	4.0	4.0	3°	2.0	¾"	803	

Working pressure shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.

8" - 12" provided double braided

Tri-Loop Movement Capabilities

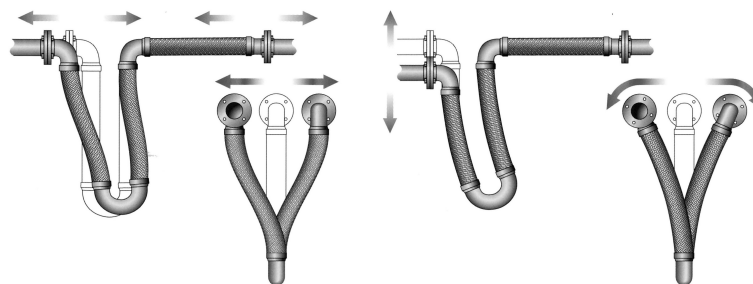

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX