


Assure Flex®

AssureFlex Connectors

- Flange, Groove, Thread and Weld-end connections available
- Carbon Steel or Stainless Steel
- Sizes from 1/2" through 12"
- UL Listed for Fire Protection systems.
- Used to address pipe offset in fire protection system
- 5 Year Warranty

- 1/2"-3" nominal rated 300 PSI, 4"-12" rated 175 PSI)
- High pressure available, 300 PSI for 4",5" and 6"

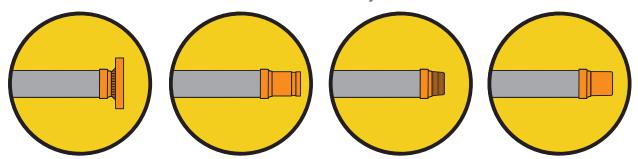

AssureFlex Expansion Loops

- Flange, Groove, Thread and Weld-end connections available
- Carbon Steel or Stainless Steel
- Sizes from ½" through 12"
- High Pressure available for 4", 5" and 6"
- UL Listed and FM Approved for Fire Protection systems.
- Application: Seismic building joints and thermal pipe motions
- 5 Year Warranty
- Movement Range: +/- 2" through 8"
- (Before High Pressure: 1/2"-3" nominal rated 300 PSI, 4"-12" rated 175 PSI)
- High pressure available, 300 PSI for 4", 5" and 6"

