


AssureFlex™ Two-Leg U Style Seismic and Expansion Loop for Fire Protection



For Fire Protection Systems

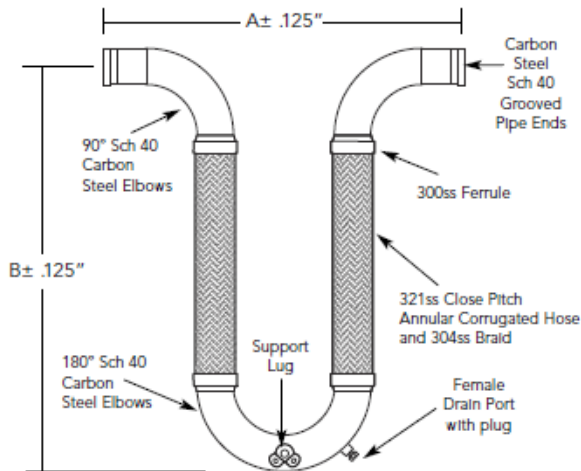

EX28995

(Flexible Joint Fitting)



CSA standard B-51 certified.
Inspected and tested by the
Technical Standards and
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @ 70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	1.00	34.00	35.00	300	½	11.0	
	1.25	35.00	38.00	300	½	15.0	
	1.50	37.00	41.00	300	½	17.0	
	2.00	39.00	47.00	300	½	27.0	
	2.50	41.00	52.00	300	¾	45.0	
	3.00	43.00	56.00	300	¾	58.0	
	4.00	47.50	63.00	175	¾	91.0	
	5.00	51.50	70.00	175	¾	133.0	
	6.00	55.50	79.00	175	¾	199.0	
	8.00	65.50	99.00	175	¾	400.0	
	10.00	74.00	102.00	175	¾	599.0	
	12.00	84.00	115.00	175	¾	877.0	

MOVEMENT CAPABILITY: +/- 24"

8" - 12" ID provided with two stainless steel braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, NY USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX